Anwendung/Application :

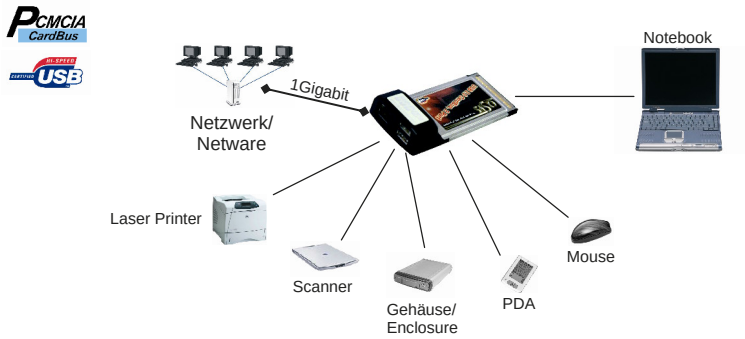

Operating System (OS): 98 SE, Me, 2000, xp, Server 2003, Windows Vista

Geprüft/Approved: CE, FC, RoHS, DE97424562, WHQL Certified Microsoft Windows

Verpackung/Packing:

PCMCIA 2 Port USB 2.0 und 1Gigabit LAN Karte, 32-Bit

Beschreibung :	• Die EX-1211 USB 2.0 PCMCIA Karte stellt zwei USB 2.0 und ein 1Gigabit LAN Port zur Verfügung. Sie ist entwickelt worden um weitere USB Peripheriegerät wie zum Beispiel Scanner, Externe Gehäuse, Drucker ect.. Mit dem Gigabit LAN Anschluss besteht zusätzlich die Möglichkeit einfach eine Verbindung mit einem Netzwerk oder dem Internet herzustellen. Die EX-1211 unterstützt auch ältere USB 1.1 Peripheriegeräte.
Merkmale USB 2.0 : Merkmale Netzwerk :	• USB Version 1.0 bis 2.0 • Unterstützt bis zu 127 Geräte • Kompatibel zu Microsoft Windows Standard Open HCD Treiber • 10Base-T, 100Base-TX, 1000Base-TX • IEEE802.3, 802.3u, 802.3ab Protokoll • Automatische Erkennung der Datenübertragung von 10Mbps, 100Mbps oder 1000Mbps
Chip-Set :	• NEC • Realtek
Datentransfer-Rate :	• USB 2.0: Bis 480Mbps / Netzwerk: bis 1000Mbps
Anschlüsse :	• 2 x USB 2.0 A-Buchsen • 1 x LAN RJ45
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 70^{0}C • 5 bis 90%
Hardwaresysteme :	• PCMCIA CardBus 32-Bit
Abmessung / Gewicht :	• 117 x 53mm / 150g
Lieferumfang :	• EX-1211, Treiber CD, Handbuch

PCMCIA 2 port USB 2.0 and 1Gigabit LAN card, 32-Bit

Description:	• The EX-1211 is a high performance PCMCIA to 1Gigabit LAN 1 Port and USB host bus adapter with 2 ports, which is fully compatible with the OHCI specification V1.1. and USB 2.0 ECHI standard. It is an ideal technology for external storage devices, digital cameras, webcams, scanners and much more. With the Gigabit LAN port you can easy connect to a Netware or Internet. The EX-1211 is an ideal upgrade to support all USB-compatible devices for the rapidly changing host computer to preserve user's investments in the USB bus.
Feature USB 2.0 : Feature Netware :	• USB version 1.0 to 2.0 • Compatible to Microsoft Windows Standard Open HCD Driver • Support up to 127 device • 10Base-T, 100Base-TX, 1000Base-TX • IEEE802.3, 802.3u, 802.3ab Protocol • Automatically recognize of data transfer of 10Mbps, 100Mbps or 1000Mbps
Chip-Set :	• NEC • Realtek
Data transfer rate :	• USB 2.0: Up to 480Mbps / Netware: up to 1000Mbps
Connectors :	• 2 x USB 2.0 Type A-female • 1 x LAN RJ45
Operating Temperature : Operating Humidity :	• 0 to 70^{0}C • 5 to 90%
Hardware system :	• PCMCIA CardBus 32-Bit
Size / Weight :	• 117 x 53mm / 150g
Packaging contents :	• EX-1211, Driver CD, Manual